

MultiDog Hybride Connector - WL-6R

The MultiDog Hybrid Connector combines the best of the already field proven MultiDog lifting and weaklink connectors.

This hybrid connector is designed for lifting and installation of well workover tooling without disconnecting to surface. In an emergency, the Weak-link will ensure release without damaging the well.

After an emergency Weak-link release, re-connection is performed with an ROV.

The MultiDog Hybride connector can easily be switched from safe lifting mode to Weak-link mode without decreasing the safety during operation.


The re-usable MultiDog Hybride connector is configurable to suit the job requirements both for safe lifting and required quick release load.

Fail-safe design ensures that the connector cannot be released under load.

Specification

Capacity: Certified according to Maskinforskriften nr 544
Lifting Capacity 85 ton SWL
Break Load On Request

Dimensions: Weight in air 340 kg
Ø320 x 1100mm
Material S165M

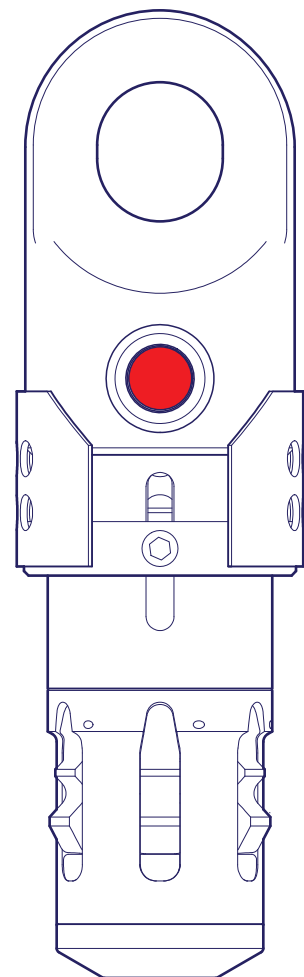

To be used together with FM-6R receptacle ring.



The field proven MultiDog connector combines state-of-the-art material technology with reusable rugged lightweight construction to save time and money during subsea installation and recovery operations