


MultiDog Weak-link Connector - WL- 3R

Where a controlled emergency release is required, the MultiDog Weak-link connector ensures release while maintaining high safety standards.

WL-3R is widely used as an emergency release system for heavy Work ROV launch systems.

The re-usable MultiDog Weak-link connector is configurable to suit the job requirements and to date has been fabricated and tested in a range up to 80 ton release load.

The tool is reusable and can be deployed at any depth.

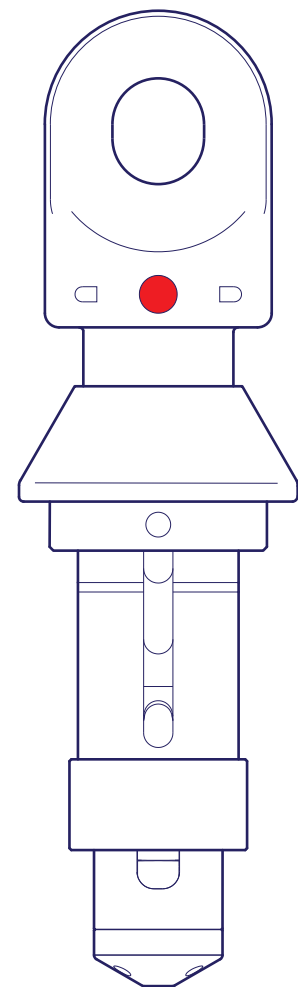

Specification

Capacity: Certified according to Maskinforskriften nr 544
Weak-link capacity up to 80 ton

Dimensions: Weight in air 150 kg
Ø295mm x 1035mm
Material S165M

To be used together with FM-3R receptacle ring.



The field proven MultiDog connector combines state-of-the-art material technology with reusable rugged lightweight construction to save time and money during subsea installation and recovery operations